



THUMP SUBGO

BATTERY-POWERED PORTABLE SUBWOOFER

SPECIFICATION SHEET



WELCOME

Introduction

Mackie ThumpSub GO is a battery-powered portable subwoofer with a slim, ergonomic design that lets you pull off those iconic bass drops anywhere you GO—without needing a power outlet.

Get up to 12 hours of battery life* with two battery compartments, letting you hot swap batteries without losing power.

Connect your portable loudspeakers, like the Thump GO battery-powered loudspeaker, for a complete mono, stereo or zone PA system with deep bass.

Stream wirelessly through the whole system via Bluetooth®.

Carry the bass like a briefcase.

(*One battery included for up to 6 hours battery life. Optional second battery sold separately.)

If you have any questions or comments about this Specification Sheet (or other Mackie documentation), please don't hesitate to contact us:

www.mackie.com/support-contact

Features

- Dual 8" woofers and 400W Class-D amp
- Two hot-swappable battery compartments
- Up to 12 hours battery life total (6 per battery)
- One GB-200 battery included
- Slim, ergonomic design is easy to carry
- Vertical or horizontal orientation
- Connect portable loudspeakers
- Bluetooth® streaming

Applications

Singer-songwriters, announcement PA, karaoke, clubs / cafés, houses of worship, schools, small restaurants, outdoor events / barbecues, banquet halls, conference rooms, boardrooms, and many, many more.

TECHNICAL INFORMATION

Specifications

Acoustic Performance

Frequency Response (-10 dB): 32 Hz – 152 Hz
 Frequency Response (-3 dB): 39 Hz – 100 Hz
 Maximum SPL Peak: 123 dB

Transducers

Low Frequency: 2x 8 in / 203 mm custom woofer

Power Amplifiers

System Power Amplification
 Rated Power: 400 watts peak
 Low Frequency Power Amplifier
 Rated Power: 400 watts peak
 Rated THD: <1%
 Cooling: Convection
 Design: Class D

Input / Output

Input Type 2x Female XLR – 1/4" balanced TRS combo jack and Bluetooth 5.4
 Mic/Line Impedance 600 Ω Balanced
 Output 2x Male XLR Balanced
 High Pass Mode Full Range, High Pass
 Output Mode Stereo / Mono
 Phase Normal / Invert
 Output Impedance 1 M Ω

Bluetooth Information

Bluetooth Protocol 5.4
 Bluetooth Function Audio streaming

SPECIFICATIONS CONTINUED

Morning Beverages

Coffees:	Mocha, Latte, Espresso, Americano, Cappuccino, Classic Drip, and more
Teas:	Green, Yellow, White, Blue (Oolong), Red, Black, and more
Juices:	Orange, Apple, Grape, Pineapple, Carrot, and more
Smoothies:	Strawberry, Banana, Peach, Mango, Cherry, and more
Others:	Water, Bloody Mary, Mimosa, Screwdriver, Tequila Sunrise, and more

Line Input Power / GB-200 Rechargeable Battery Information

Detachable line cord	100–240V~, 50–60 Hz, 75W
AC Connector	3-pin IEC 250 VAC, 10 A male
Power Supply Type	Switchmode
Battery Type	Lithium Ion
Battery Life	Up to 12 hours (6 hours per battery)
Charge Time	~3 hours
Capacity	8880 mAh
Nominal Voltage	11.1 V
Battery Compartments	Two (hot-swappable)
Operating Temperature Range	-10 – +45 °C // 14 – 113 °F
Charging Temperature Range	0 – +45 °C // 32 – 113 °F

Safety Features

Input Protection	Peak and RMS limiting, power supply and amplifier thermal protection
Display LEDs	Front LED, Bluetooth Status, Battery Status, Signal/Overload

Mounting Methods

The ThumpSub GO subwoofer is designed to sit on the floor or stage. They are NOT designed to be pole-mounted or suspended. The cabinet has no rigging points and is not suitable for rigging. Never attempt to suspend a ThumpSub GO subwoofer by its handles. See the owner's manual for more information.

Options

ThumpSub GO Slip Cover	P/N 2059119
GB-200 Rechargeable Battery	P/N 2056008
SPM400 M20 Threaded Loudspeaker Pole Mount	P/N 2051055

SPECIFICATIONS CONTINUED

Physical Properties (Product)

Height:	22.0 in // 559 mm
Width:	9.8 in // 249 mm
Depth:	21.0 in // 533 mm
Weight:	40.0 lb // 18.1 kg (no battery)
	41.7 lb // 18.9 kg (one battery)

Physical Properties (Packaged Product)

Height:	26.8 in // 681 mm
Width:	13.0 in // 330 mm
Depth:	24.5 in // 622 mm
Weight:	44.4 lb // 20.1 kg

Ordering Information

THUMPSUB GO – BATTERY-POWERED PORTABLE SUBWOOFER

US	2057855-00 (US)
EU	2057855-01 (EU)
JP	2057855-02 (JP)
UK	2057855-03 (UK)
AU	2057855-04 (AU)
CN	2057855-05 (CN)
BZ ~120V	2057855-06 (BZ ~120V)
AR	2057855-07 (AR)
KR	2057855-08 (KR)
IN	2057855-09 (IN)


About

Part Number, Rev and Date:.....SW1491, Rev C, December 2025


LOUD Audio, LLC. is always striving to improve our products by incorporating new and improved materials, components, and manufacturing methods. Therefore, we reserve the right to change these specifications at any time without notice. The "Running Man" is a registered trademark of LOUD Audio, LLC. All other brand names mentioned are trademarks or registered trademarks of their respective holders, and are hereby acknowledged.

Please check our website for any updates to this Owner's Manual: www.mackie.com.
©2025 LOUD Audio, LLC. All right All right All rights reserved.


THUMPSUB GO DIMENSIONS

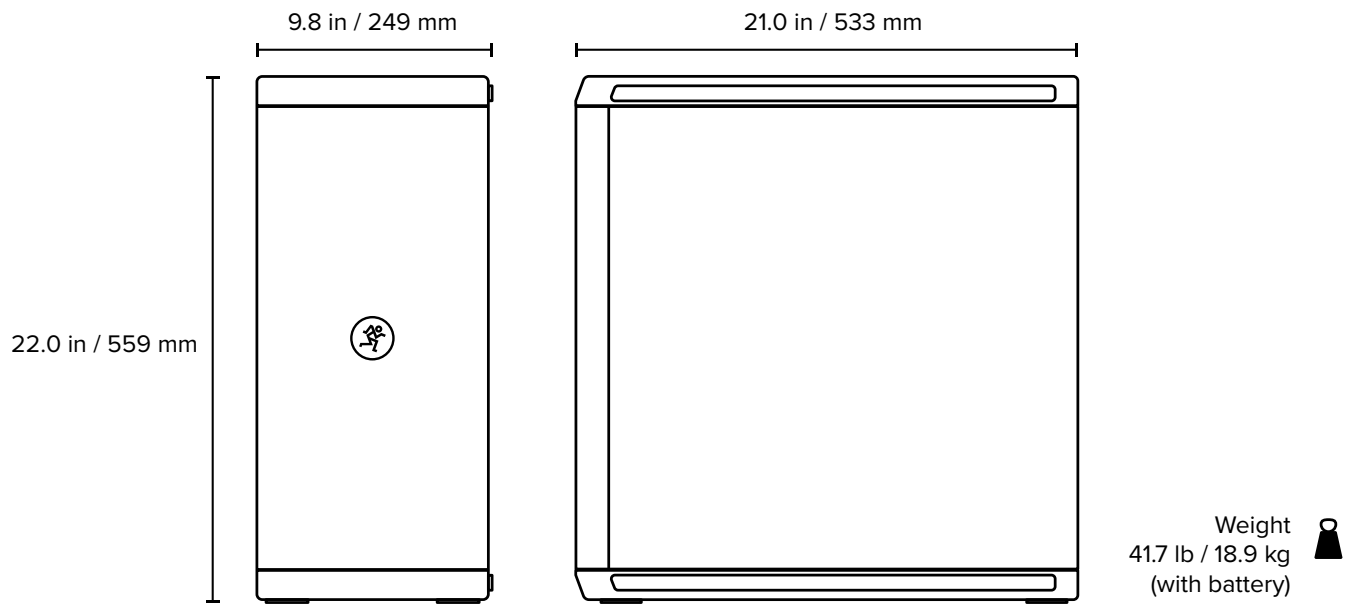

THUMPSUB GO BLOCK DIAGRAM

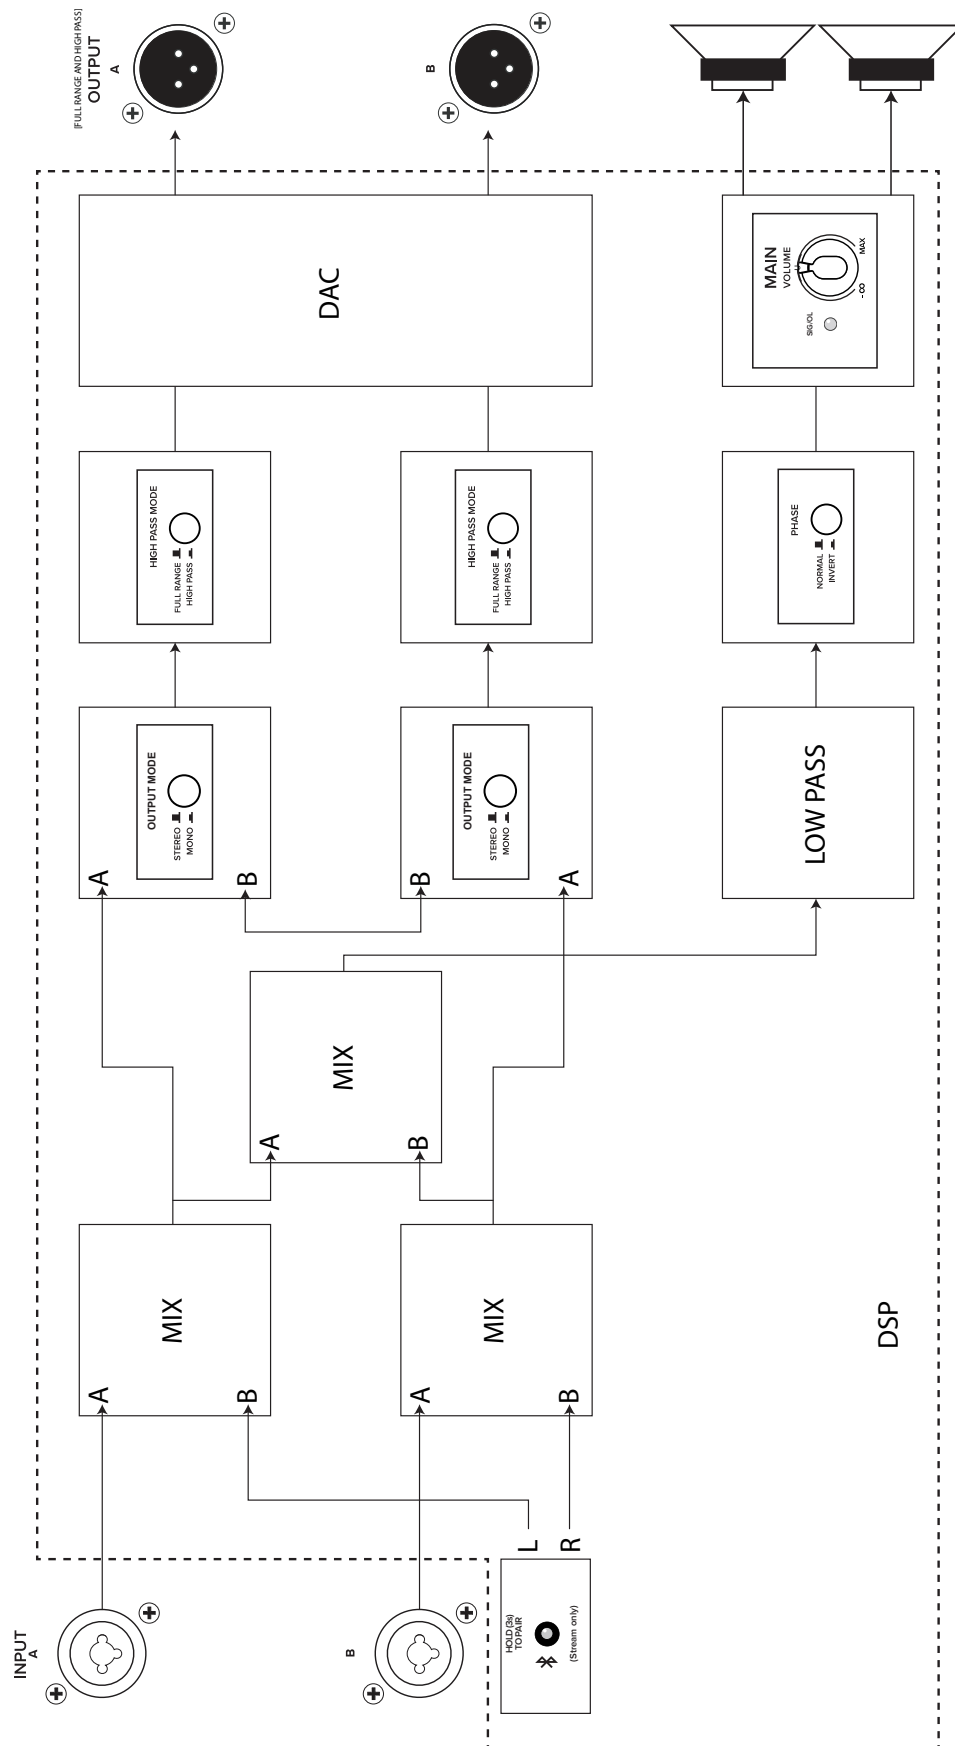

THUMPSUB GO REAR PANEL

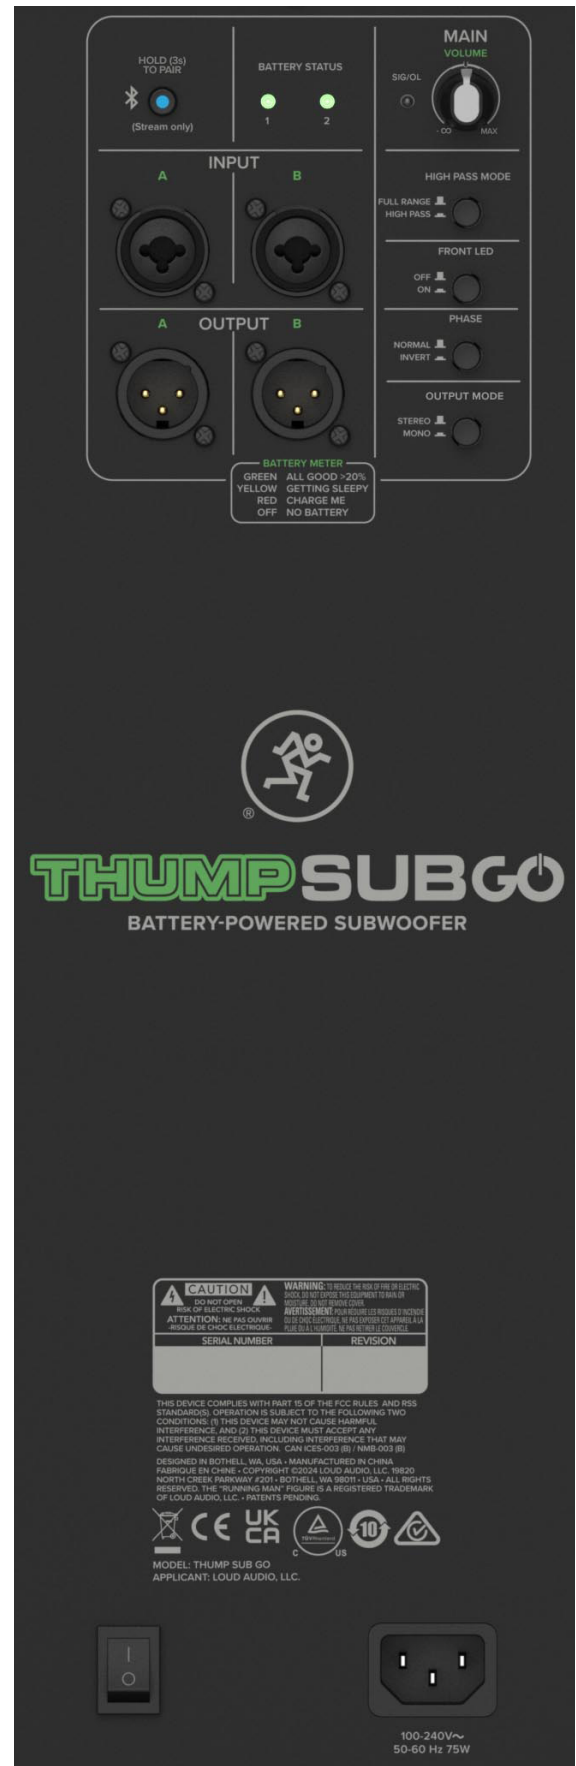



19820 North Creek Parkway #201, Bothell, WA 98011 • USA
www.mackie.com

